

SIZE SPECIFICATIONS:

THIS INSTRUCTION SHEET IS APPLICABLE FOR 12 SEGMENT HALO SIZES.

HALO SIZES:

20' HALO

FRAME ASSEMBLY

STEP 1: BOTTOM RING

PARTS REQUIRED: 12 - BOTTOM RING SEGMENT

- ▶ Follow the number sequence
- ▶ Start building the bottom ring by connecting one bottom ring segment at a time.

STEP 2:


PARTS REQUIRED: 6 - UPRIGHTS




- ▶ Connect the Uprights to the bottom ring

STEP 3: UPPER RING AND FRAME

PARTS REQUIRED: 12 - UPPER RING SEGMENT



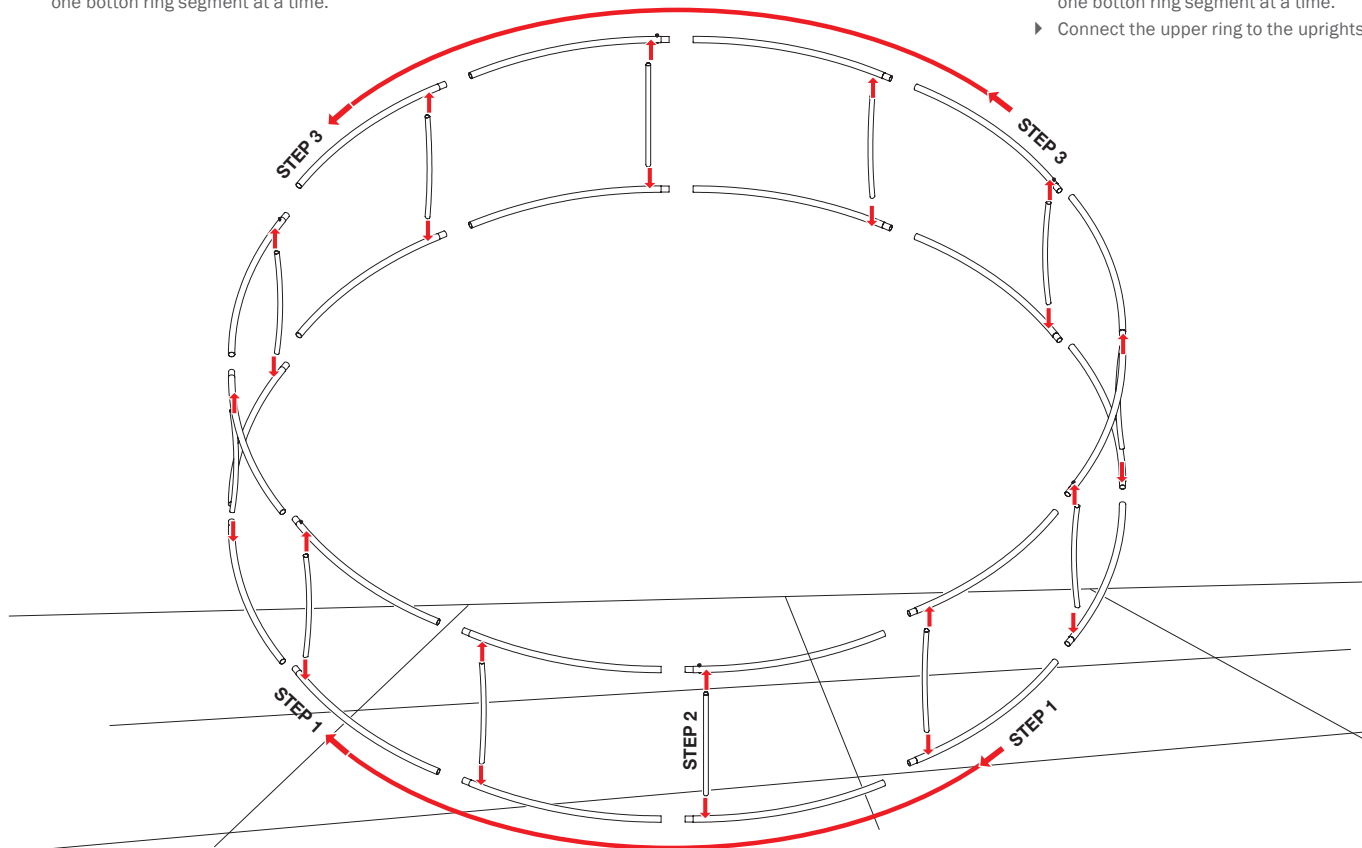
- ▶ Follow the number sequence
- ▶ Start building the upper ring by connecting one bottom ring segment at a time.
- ▶ Connect the upper ring to the uprights.



PARTS	QTY
 RING SEGMENT	18
 TOP RING SEGMENT WITH HANGING POINTS	6
 UPRIGHT	12

FABRIC INSTALLATION

- ▶ Make sure work area is clean of dirt and other materials that might damage or dirty the fabric. Use a drop cloth if possible & never use newsprint
- ▶ Put unzip fabric on the floor and open up the fabric.
- ▶ Put frame on top of fabric, make sure to match the button holes to the hanging points
- ▶ Pull the outside and inside fabric up and close zippers



This document contains proprietary information. No portion may be disclosed to other, reproduced or used in any way without our written authorization.

©2018 McRae Imaging Inc.