

DESCRIPTION:

CONSTRUCTION



| PART | QTY | OPT. |
|------|-----|------|
|------|-----|------|

| | | |
|--|----|---|
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |
| | 01 | 0 |
| | 02 | 0 |

FRAME ASSEMBLY

STEP 1: FRONT LEGS

PARTS REQUIRED: 1-01, 1-02, 1-03, 1-04, 1-05

- 1. Insert the front leg into the seat base.
- 2. Push the front leg into the seat base.
- 3. Push the front leg into the seat base.
- 4. Push the front leg into the seat base.
- 5. Push the front leg into the seat base.
- 6. Push the front leg into the seat base.
- 7. Push the front leg into the seat base.
- 8. Push the front leg into the seat base.
- 9. Push the front leg into the seat base.
- 10. Push the front leg into the seat base.

STEP 2


PARTS REQUIRED: 1-06, 1-07

- 1. Push the side rail into the seat base.
- 2. Push the side rail into the seat base.
- 3. Push the side rail into the seat base.
- 4. Push the side rail into the seat base.
- 5. Push the side rail into the seat base.
- 6. Push the side rail into the seat base.
- 7. Push the side rail into the seat base.
- 8. Push the side rail into the seat base.
- 9. Push the side rail into the seat base.
- 10. Push the side rail into the seat base.

STEP 3


PARTS REQUIRED: 1-08, 1-09, 1-10, 1-11, 1-12

- 1. Push the backrest rail into the seat base.
- 2. Push the backrest rail into the seat base.
- 3. Push the backrest rail into the seat base.
- 4. Push the backrest rail into the seat base.
- 5. Push the backrest rail into the seat base.
- 6. Push the backrest rail into the seat base.
- 7. Push the backrest rail into the seat base.
- 8. Push the backrest rail into the seat base.
- 9. Push the backrest rail into the seat base.
- 10. Push the backrest rail into the seat base.
- 11. Push the backrest rail into the seat base.
- 12. Push the backrest rail into the seat base.

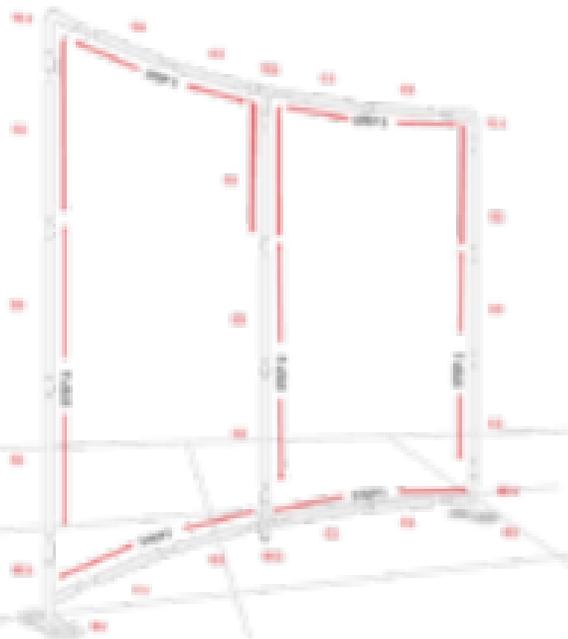

FABRIC INSTALLATION

1. Lay the fabric on the seat base.
2. Lay the fabric on the seat base.
3. Lay the fabric on the seat base.
4. Lay the fabric on the seat base.
5. Lay the fabric on the seat base.
6. Lay the fabric on the seat base.
7. Lay the fabric on the seat base.
8. Lay the fabric on the seat base.
9. Lay the fabric on the seat base.
10. Lay the fabric on the seat base.



Maximum recommended
weight
Maximum recommended
height
Maximum recommended
width

Maximum weight